

Kliješta univerzalna s gumbom, za siguran rad na visini

447/1HPP-H



Profili

Premium 


Atributi proizvoda

- materijal: krom-vanadij
- kovana, potpuno poboljšana i ojačana
- prihvatne površine induktivno zakaljene
- završna obrada: kromiranje po standardu ISO 1456:2009
- robusne ručke izolirane dvokomponentnim navlakama

Prednosti:

- Kako bi se osiguralo najviši stepen sigurnosti, pričvrtna kopča nije samo umetnuta kroz plastični rukavac već i kroz osnovni materijal - kliješta
- zakovica metalne kopče koja se ne može demontirati
- na svakom je alatu označena težina alata
- dvije kopče mogu se učvrstiti u kopču, što osigurava sigurnu promjenu alata
- Unior je prilagođen za rad na visini i održava osnovne funkcije alata
- Nazubljena čeljust oblikovana je tako da garantira optimalan prihvat predmeta
- Regulacija otvora čeljusti u 10 pozicija

- Ekstremna moć prihvata: osnova i oblik čeljusti kliješta unatoč vitkim linijama omogućuju veću mogućnost prihvata, te tako garantiraju stabilnost, sigurnost pri radu te veliku efektivnost.
- Rad: kliješta zbog vitke konstrukcije omogućuju rukovanje jednom rukom u skučenim prostorima.
- Ergonomija: drške su oblikovane tako da se maksimalno prilagođavaju ruci, što garantira veći otpor i sigurnost kod posla.

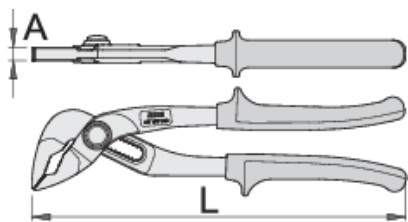


	L	A	Omax	
626343	240	8,5	40	406

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.


Upotreba (pictures)



The carabiner on the lanyard is attached to the ring on the tool. The rings on the tools are large enough to accept 2 carabiners.



The carabiner on the lanyard has to be protected against opening using a lock ring.



Before removing the tool from the belt, unscrew the lock ring on the carabiner on the belt.



Open the carabiner on the belt and remove the tool, which is attached to a lanyard, from the carabiner on the belt. The tool is now ready for use.



Correct attachment of the tool to the lanyard. Return the tool to the belt following the steps in reverse order.



Using the socket remover (Article 1111) depress the pin in the hole while removing the socket from the square drive of the ratchet and then switch the socket or extension.

Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.
- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.

- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

Safety (pictures)



Frequently asked questions

Can we use a tool for working at height as a normal tool?

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

Does the stated weight per tool for safe work at height also include the weight of the metal ring?

The weight of the tool marked on the tool, included also weight of metal ring