

Kliješta univerzalna HYPO, za siguran rad na visini

442/1HYPO-H



Profilii

Premium  


Atributi proizvoda

- materijal: Premium poseban alatni čelik
- prihvatile površine induktivno zakaljene
- robuse ručke izolirane dvokomponentnim navlakama
- kovana, potpuno poboljšana i ojačana

Prednosti:

- Kako bi se osigurala najviša razina sigurnosti, metalna kovana zakovica, nije stavljenja kroz plastični tulac već kroz osnovni materijal-kliješta
- kovana metalna kopča koja se ne može rastaviti
- na svakom je alatu označena težina alata
- u kopču je moguće učvrstiti dva karabina, što omogućuje sigurnu zamjenu alata
- Alat Unior je prilagođen radu na visini i održava osnovne funkcije alata
- Hipo kliješta su samo-podešavajuća i zato nije potrebno prethodno podešavanje širine čeljusti prije prihvata radnog predmeta
- podešavanje prihvata kliješta jednom rukom
- Kliješta se odlično prilagođavaju radnom predmetu

- maksimalan prihvat (otvor čeljusti kliješta) je Ø40 mm
- Mechanizam za fiksiranje položaja omogućava lakše odlaganje alata kada se kliješta ne koriste.

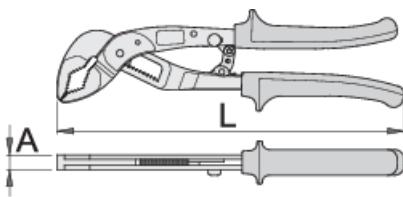

| | | | | |
|--|---|---|-------------------------|--|
| | L | A | Ø_{max} | |
|--|---|---|-------------------------|--|

626244

240

9

40

405

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.


upotreba (pictures)



Pričvrstite karabiner na remenu za vezivanje na kopču alata. Kopče su dovoljno velike da drže 2 karabinera.



Karabiner se mora osigurati od otvaranja zatezanjem matice.



Prije skidanja alata s remena, odvrnite maticu na karabineru.



Otkopčajte karabiner na remenu i uklonite alat pričvršćen za uzicu. Alat je sada spremjan za rad.



Na slici je prikazan pravilno pričvršćen alat na remenu za vezivanje s kojim koristimo alat.



Pritisnite iglu u rupu s alatom za rastavljanje nasadnog ključa (stavka 1111), te istovremeno uklonite nasadni ključ sa račne i zamijenite nasadni ključ ili nastavak.

Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.

6mm.

- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.

- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

Safety (pictures)



Frequently asked questions

Can we use a tool for working at height as a normal tool?

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

Does the stated weight per tool for safe work at height also include the weight of the metal ring?

The weight of the tool marked on the tool, included also weight of metal ring