


Composite pneumatic reversible ratchet

1522



Profiles

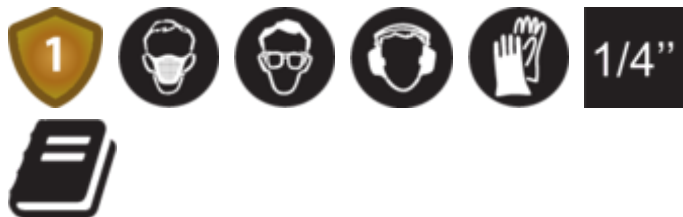

Product features

- free speed 200 revolution per minutes
- max. torque 41 Nm
- recommended air pressure: 6,2 Bar
- air consumption 113 l/min
- gji ajrit 1/4 "


Avantazhet:

- thick wall ratchet head
- ball bearing
- cushioned grip
- new air regulator
- 360° swivel air inlet
- rear exhaust
- low noise 79dB(A)
- small and compact tool
- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction

Përdorim:

- industria e makinave

- industria avion
- pajisje bujqësore
- industria e rëndë
- makineri më të mëdha të ndërtimit
- industria e ndërtimit të anijeve
- montimi individuale
- E rëndësishme!
- Përdorimi i UNIOR NDIKIMIT bazat është i rekomanduar.

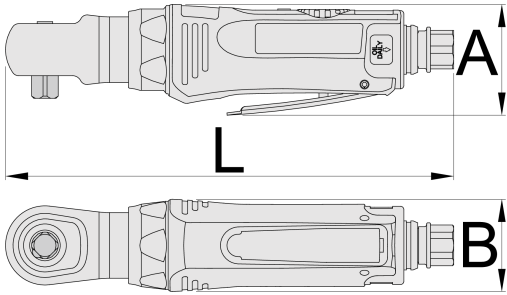

		L	A	B		
--	--	---	---	---	--	--

627565

1/4"

196

49

40,8

41

749

Retail packaging

	MA	MB	MC	
--	----	----	----	--

627565

Transport packaging

		TA	TB	TC	
--	--	----	----	----	--

627565