


Composite pneumatic reversible ratchet

1522



Profielen

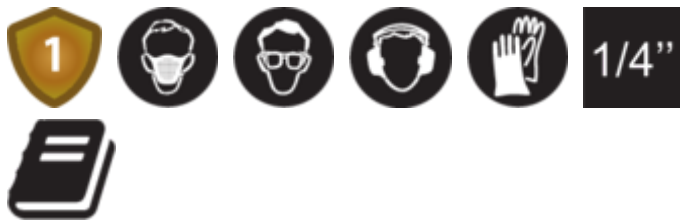

Product attributen

- free speed 200 revolution per minutes
- max. torque 41 Nm
- recommended air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"


Voordelen:

- thick wall ratchet head
- ball bearing
- cushioned grip
- new air regulator
- 360° swivel air inlet
- rear exhaust
- low noise 79dB(A)
- small and compact tool
- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction

Gebruik:

- car industry

- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting
- Important!
- The use of Unior IMPACT sockets is recommended.

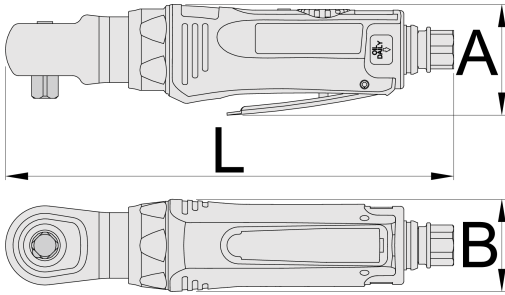

		L	A	B		
627565	1/4"	196	49	40,8	41	749

Retail verpakking

	MA	MB	MC	
627565				

Transport verpakking

		TA	TB	TC	
627565					