

# Pneumatic reversible ratchet with composite housing

1522



## Profiles



## Product features

- free speed 200 revolution per minutes
- max. torque 41 Nm
- recommended air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"


## Advantages:

- thick wall ratchet head
- ball bearing
- cushioned grip
- new air regulator
- 360° swivel air exhaust
- rear exhaust
- low noise 79dB(A)
- small and compact tool

- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction

### Usage:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting
- Important!
- The use of Unior IMPACT sockets is recommended.

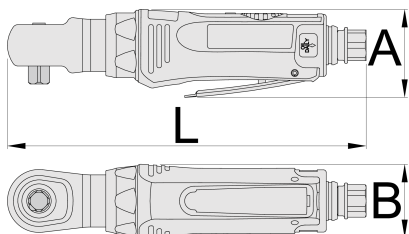

		<b>L</b>	<b>A</b>	<b>B</b>		
627565	1/4"	196	49	40,8	41	749

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

### Photo (pictures)



### Accessories



Coupling, male part



Coupling, female part



Spiral pneumatic hose



Pneumatic filter regulator and lubricator 1/4"

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.