Mini antrenor pneumatic cu clichet

1522



Profile



Caracteristicile produsului

- Turatia maxima in gol
- Cuplu maxim 40 Nm
- Presiune nominala de lucru:6.2bar
- consum de aer 113l/min
- Racord de aer 1/4"


Avantaje:

- cap de clichet cu pereti subtiri
- Rulmenti cu bile
- Maner ergonomoc cauciucat
- Regulator nou de presiune
- racord pivotant de aer 360°
- evacuare aer prin spate
- Nivel de zgomot scazut 79dB(A)
- unealta mica si compacta
- uzinare de calitate
- comutator de pornire comod

- reglarea rapidă și comoda a sensului de rotație

Utilizare

- industria auto
- industria aerospatiala
- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale
- Important
- Folosirea capetelor de impact UNIOR este recomandata

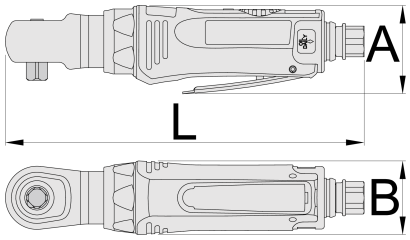

	L	A	B	Nm	
627565	1/4"	196	49	40,8	41	749

* Imaginea produsului este simbolica.Toate dimensiunile sunt exprimate în mm,greutatea în grame.

Photo (pictures)



Accessories

 Cuplaj, partea tata

 Cuplaj, partea mama

 Furtun pneumatic elicoidal

 Filtru regulator si ungator pneumatic 1/4"

Safety tips

- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.

- Always disconnect tools not in use from the air supply.