

# Mini antrenor pneumatic cu clichet

1522



## Profile



## Caracteristicile produsului

- Turatia maxima in gol
- Cuplu maxim 40 Nm
- Presiune nominala de lucru:6.2bar
- consum de aer 113l/min
- Racord de aer 1/4"


## Avantaje:

- cap de clichet cu pereti subtiri
- Rulmenti cu bile
- Maner ergonomoc cauciucat
- Regulator nou de presiune
- racord pivotant de aer 360°
- evacuare aer prin spate
- Nivel de zgomot scazut 79dB(A)
- unealta mica si compacta
- uzinare de calitate
- comutator de pornire comod

- reglarea rapidă și comoda a sensului de rotație

## Utilizare

- industria auto
- industria aerospaciala
- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale
- Important
- Folosirea capetelor de impact UNIOR este recomandata

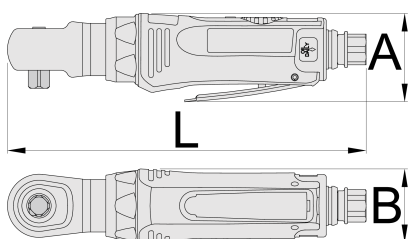

|        |      |          |          |          |    |     |
|--------|------|----------|----------|----------|----|-----|
|        |      | <b>L</b> | <b>A</b> | <b>B</b> |    |     |
| 627565 | 1/4" | 196      | 49       | 40,8     | 41 | 749 |

\* Imaginea produsului este simbolica. Toate dimensiunile sunt exprimate în mm, greutatea în grame.

## Photo (pictures)



## Accessories



Cuplaj, partea tata



Cuplaj, partea mama



Furtun pneumatic elicoidal



Filtru regulator si ungator pneumatic 1/4"

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.