

# 迷你气动棘轮扳手

1532



## 配置文件



## 产品属性

- 自由速度每分钟200转
- 最大扭矩54 Nm
- 推荐气压:6.2Bar
- 空气消耗量113升/分钟
- 1/4"进气口
- max bolt size M8


## 优势：

- 厚壁棘轮头
- 滚珠轴承
- 缓冲控制
- 新风调节系统
- 360°旋转进气口
- 后排气
- 低噪声79分贝(A)
- 小型冲击工具
- 优质产品

- 手调开关
- 快速方便的旋转方向调整

#### 用途:

- 汽车行业
- 航空业
- 农业设备
- 重工业
- 大型建筑机械
- 造船业
- 单独安装
- 重要事项!
- 建议使用Unior气动套筒

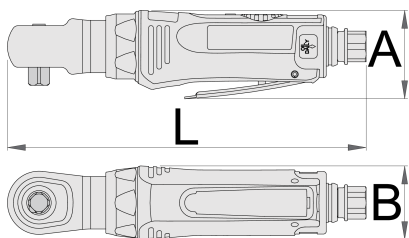

		L	A	B		
627566	3/8"	196	49	40,8	54	748

\* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

#### Photo (pictures)




#### Accessories




气动管接头



气动管接头



气动管接头



气动管接头



3/8"气动过滤调节器和润滑器



1/2"气动过滤调节器和润滑器



螺旋气动软管

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.