

# Mini slag-ratelschroevendraaier 3/8"

1532



## Profielen



3/8"



## Product attributen

- free speed 200 revolution per minutes
- max. torque 54 Nm
- recommended air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"
- max bolt size M8


## Voordelen:

- thick wall ratchet head
- ball bearing
- cushioned grip
- new air regulator
- 360° swivel air exhaust
- rear exhaust
- low noise 79dB(A)
- small and compact tool
- quality production

- handy turn-on switch
- fast and handy adjustment of the rotation direction

## Gebruik:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting
- Important!
- The use of Unior IMPACT sockets is recommended.

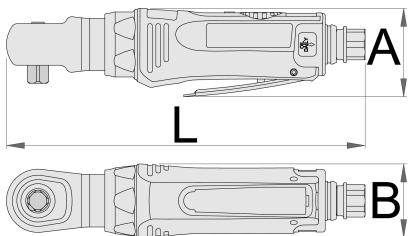

		L	A	B		
--	--	---	---	---	--	--

627566

3/8"

196

49

40,8

54

748

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

## Foto (Afbeeldingen)



## Accessoires



Koppeling, man



Koppeling, man



Koppeling, vrouw



Koppeling, vrouw



Pneumatische filterdrukregelaar en olievernevelaar 3/8"



Pneumatische filterdrukregelaar en olievernevelaar 1/2"



Spiraalslang

## Veiligheidstips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.