

Antrenor cu clichez pneumatic,mic

1532



Profile



3/8"



Caracteristicile produsului

- Turatia maxima in gol
- Moment de torsiune max. 27 Nm
- Presiune nominala de lucru: 6.2bar
- consum de aer 113l/min
- Racord de aer 1/4"
- max bolt size M8


Avantaje:

- cap de clichez cu pereti subtiri
- Rulmenti cu bile
- Maner ergonomic cauciucat
- Regulator nou de presiune
- racord pivotant de aer 360°
- evacuare aer prin spate
- Nivel de zgomot scazut 79dB(A)
- unealta mica si compacta
- uzinare de calitate

- comutator de pornire comod
- reglarea rapidă și comoda a sensului de rotație

Utilizare

- industria auto
- industria aerospatială
- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale
- Important
- Folosirea capetelor de impact UNIOR este recomandata

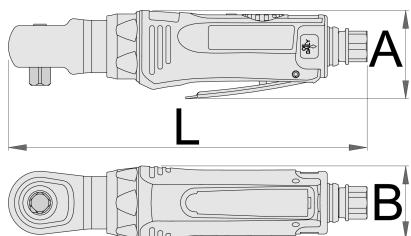

		L	A	B		
627566	3/8"	196	49	40,8	54	748

* Imaginea produsului este simbolica. Toate dimensiunile sunt exprimate în mm, greutatea în grame.

Photo (pictures)



Accessories



Cuplaj, partea tata



Cuplaj, partea tata



Cuplaj, partea mama



Cuplaj, partea mama



Filtru regulator si ungator pneumatic 3/8"



Filtru regulator si ungator pneumatic 1/2"



Furtun pneumatic elicoidal

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.