

# 气动棘轮扳手

1552



## 配置文件



## 产品属性

- 自由速度每分钟150转
- 最大扭矩值90 Nm
- 推荐气压:6.2Bar
- 空气消耗量113升/分钟
- 1/4"进气口
- 最大螺栓尺寸M10

## 优势：

- 厚壁棘轮头
- 滚珠轴承
- 缓冲控制
- 新风调节系统
- 360°旋转进气口
- 后排气
- 低噪声79分贝(A)
- 小型冲击工具
- 优质产品

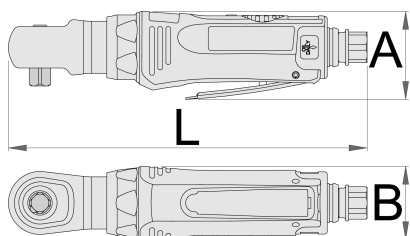
- 手调开关
- 快速方便的旋转方向调整




#### 用途:

- 汽车行业
- 航空业
- 农业设备
- 重工业
- 大型建筑机械
- 造船业
- 单独安装

#### 重要事项！

- 建议使用Unior气动套筒



		<b>L</b>	<b>A</b>	<b>B</b>		
627567	1/2"	256	56	47,8	90	1332

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

#### 用途 (pictures)



#### Photo (pictures)



## Accessories



气动管接头



气动管接头



气动管接头



气动管接头



3/8"气动过滤调节器和润滑器



1/2"气动过滤调节器和润滑器



螺旋气动软管

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.



- Always disconnect tools not in use from the air supply.

- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.