

气动棘轮扳手

1552



配置文件



产品属性

- 自由速度每分钟150转
- 最大扭矩值90 Nm
- 推荐气压:6.2Bar
- 空气消耗量113升/分钟
- 1/4"进气口
- 最大螺栓尺寸M10

优势：

- 厚壁棘轮头
- 滚珠轴承
- 缓冲控制
- 新风调节系统
- 360°旋转进气口
- 后排气
- 低噪声79分贝(A)
- 小型冲击工具
- 优质产品

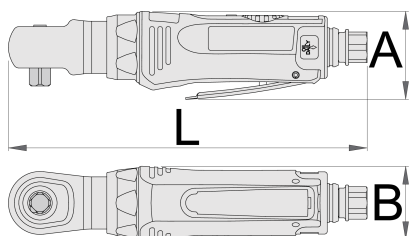
- 手调开关
- 快速方便的旋转方向调整



用途:

- 汽车行业
- 航空业
- 农业设备
- 重工业
- 大型建筑机械
- 造船业
- 单独安装

重要事项！

- 建议使用Unior气动套筒



		L	A	B		
627567	1/2"	256	56	47,8	90	1332

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



Photo (pictures)



Accessories



气动管接头



气动管接头



气动管接头



气动管接头



3/8"气动过滤调节器和润滑器



1/2"气动过滤调节器和润滑器



螺旋气动软管

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.



- Always disconnect tools not in use from the air supply.

- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.