

# Pneumatic reversible ratchet with composite housing

1552



## 프로파일



## 제품 특징

- free speed 150 revolution per minutes
- max. torque 90 Nm
- recommended air pressure: 6,2 Bar
- air consumption 113 l/min
- →
- max bolt size M10

## 장점:

- thick wall ratchet head
- ball bearing
- cushioned grip
- new air regulator
- 360° swivel air exhaust
- rear exhaust
- low noise 79dB(A)


- small and compact tool
- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction

#### 용도:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting

#### 중요!

- The use of Unior IMPACT sockets is recommended.

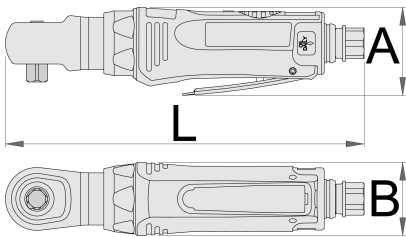

|        |      |          |          |          |    |      |
|--------|------|----------|----------|----------|----|------|
|        |      | <b>L</b> | <b>A</b> | <b>B</b> |    |      |
| 627567 | 1/2" | 256      | 56       | 47,8     | 90 | 1332 |

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

#### 사용법 (사진)



#### 사진 (사진)



## 액세서리



Coupling, male part



Coupling, male part



Coupling, female part



Coupling, female part



Pneumatic filter regulator and lubricator 3/8"



Pneumatic filter regulator and lubricator 1/2"



Spiral pneumatic hose

## 안전 수칙



- 공구가 제대로 작동하려면 작업 중 공구의 압력이 6.2bar 이상이어야 합니다.
- 공기 필터와 흡입 에어 공급 장치를 정기적으로 청소하고 건조시킵니다.
- 최대 공구 수명을 위해 항상 올바른 오일 혼합과 함께 깨끗하고 건조한 공기를 사용하십시오.



- 사용하지 않는 공구는 항상 에어 공급 장치에서 분리하십시오.

- 사용하기 전에 조인트를 확인하고 튜브 및 기타 장비가 손상되지 않았는지 확인하십시오.
- 모든 공구는 보관하기 전에 부드럽게 기름칠을 해야 합니다.
- 공압 공구는 항상 물에서 멀리 떨어진 건조한 장소에 보관하십시오.
- 항상 정품 스페어 파트를 사용하십시오.
- 수리는 Unior d.d.에서 승인한 승인된 직원만 수행할 수 있습니다.