

# Pneumatische slag- ratelschroevendraaier 1/2"

1552



## Profielen



## Product attributen

- free speed 150 revolution per minutes
- max. torque 90 Nm
- recommended air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"
- max bolt size M10

## Voordelen:

- thick wall ratchet head
- ball bearing
- cushioned grip
- new air regulator
- 360° swivel air exhaust
- rear exhaust
- low noise 79dB(A)


- small and compact tool
- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction

#### Gebruik:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting

#### Important!

- The use of Unior IMPACT sockets is recommended.

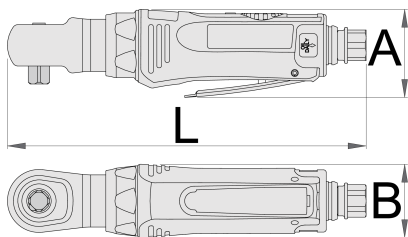

		<b>L</b>	<b>A</b>	<b>B</b>		
627567	1/2"	256	56	47,8	90	1332

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

#### Gebruik (Afbeeldingen)



#### Foto (Afbeeldingen)



## Accessoires



Koppeling, man



Koppeling, man



Koppeling, vrouw



Koppeling, vrouw



Pneumatische filterdrukregelaar en olieverniveelaar 3/8"



Pneumatische filterdrukregelaar en olieverniveelaar 1/2"



Spiraalslang

## Veiligheidstips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.



- Always disconnect tools not in use from the air supply.

- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.