

# Angle impact wrench

1564



## Usage

---



## Profiles

---

## Product attributes

- free speed 8000 revolution per minutes
- max. torque 343 Nm
- recommended air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"



- noise level 92 dB(A)

### Advantages:


- aluminium motor housing
- composite handle
- handle exhaust (silencer)
- one hand forward / reverse
- compact and powerful
- jumbo hammer mechanism

### Usage:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting

### Important!

- Always use Unior IMPACT sockets.

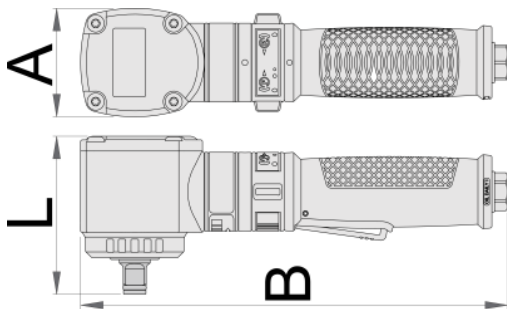

		<b>L</b>	<b>A</b>	<b>B</b>		
627569	1/2"	88	60	237	343	1332

### Retail packaging

	<b>MA</b>	<b>MB</b>	<b>MC</b>	
627569				

### Transport packaging



TA

TB

TC



627569