Izvijač pneumatski, prihvat 1/2"

1566



Profili



Atributi proizvoda

- 8.000 o/min u slobodnom hodu
- Max. okretni momenat 1223 Nm
- .
- Preporučeni radni tlak: 6, 2 bara
- Potrošnja zraka: 113 l/min
- Priključak za zrak: 1/4"
- Razina buke 93 dB (A)
- Za vijke do M24

Prednosti:

- Kompozitno kućište motora
- Dvojni udarni mehanizam TwinHammer
- Jednoručna izmjena smjera rada
- Kompaktan i moćan
- Obrača brzine

Upotreba

- Automobilska industrija
- Avionska industrija
- Poljoprivredna mehanizacija
- Teška industrija
- Veći građevinski strojevi
- Brodogradnja
- Individualna montaža

Važno!

- UVIJEK koristite Uniorove IMPACT nasadne ključeve i pribor

		L	A	B	Nm	
627570	1/2"	187	70	193	1223	2227

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

upotreba (pictures)



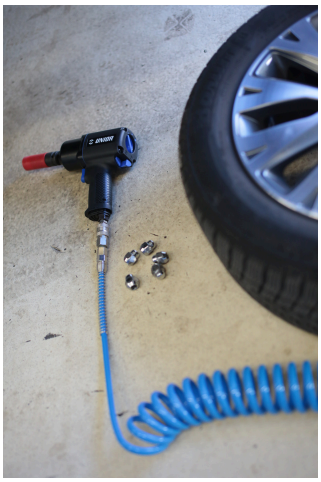




Photo (pictures)



Accessories

 Spojnica muška

 Spojnica muška

 Spojnica ženska

 Spojnica ženska

 Pripremna grupa 3/8"

 Pripremna grupa 1/2"

 Cijev spiralna za zrak

Safety tips

- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.

- Always disconnect tools not in use from the air supply.

- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.