

Kliješta za skidanje izolacije

478/4G



Profili




Atributi proizvoda

- materijal: Premium Plus ugljični čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- završna obrada čeljusti: fino brušenje
- završna obrada: fosfatiranje po standardu DIN12476
- robusne plastične navlake za ručke

Prednosti:

- sa povratnom oprugom
- za žicu od 0,6 - 10 mm²

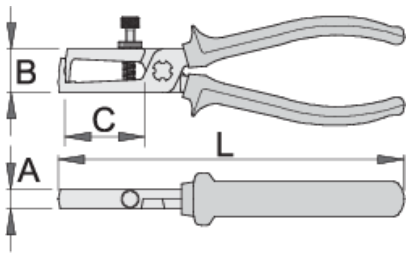

| | | | | | | |
|--|-----|---|----|---|----|---|
|  | L |  | B | A | C |  |
| 608701 | 160 | 0.6 - 10 | 18 | 9 | 40 | 178 |

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

upotreba (pictures)

