

BOLTSHARK cutter

Hidden

469SHARK/4AP



Profiles



Standards

DIN ISO 5743


Product features

- These ultra-powerful cutters are used to easily cut metal wire, including hardened and tempered alloys, and other extruded metals. They are ergonomically designed to apply a maximum force, while being easy on the hands. Drop-forged from Premium Hard Plus carbon steel with induction hardened cutting edges, BoltShark cutter can cut through up to 6mm of soft metal wire, 4mm of hard steel, and 3.6mm of tempered piano wire or steel spring. In addition to wire, the Boltshark cutters will quickly and cleanly cut through 5mm diameter nails, screws and rivets.
- drop forged from Premium Hard Plus carbon steel
- fully hardened to ~47HRc, with cutting edges induction hardened to ~64HRc
- finished with an anti-corrosive black coating and lightly oiled
- double-dipped plastic non-slip handles provide good ergonomic hand grip

Advantages:


- Engineered with a two-rivet joint, which uses a compound action to give increased cutting force with less effort.

- The strongest force needs to be applied at the start of the cut, when the handles are furthest apart. BoltShark cutters are designed with the handles tighter together allowing the maximum force to be applied from the very start of the cut.
- Central cutting edges leave a bevelled finish on both sides of the cut.
- for precise cutting of soft (up to 6 mm), hard (up to 3,5 mm) and piano wires (up to 3 mm)
- easily cuts parts such as screws, nails, rivets, etc. up to 4 mm thickness

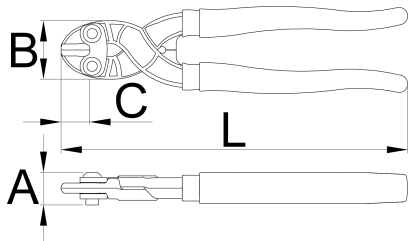

	L	B	A	C	
627533	200	34,8	19,5	16,5	354

cutting capacity (10N=1kg)



	L	max 2150 N/mm² Ø↑	max 1560 N/mm² Ø↑	max 750 N/mm² Ø↑
627533	200	3	3,5	6

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Usage (pictures)



Photo (pictures)

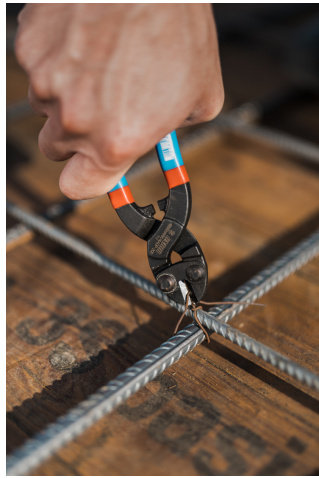

Frequently asked questions

Do the names Shark and Boltshark mean anything?

These names describe the principles behind operating the cutting pliers.

What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.