

# Škare za betonsko željezo sa izmjenjivim trokutnim noževima

596PLUS/6G



## Profili



## Atributi proizvoda

- kovana, potpuno poboljšana i ojačana
- noževi izmjenjivi i podesivi u tri položaja, u cijelosti ojačani i zakaljeni
- ručke izrađene od čelične cijevi, lakirane i obložene robusnom plastikom


## Prednosti:

- ekstremna snaga i minimalna težina
- izuzetna otpornost na maksimalne sile rezanja
- kompletna anti-korozivna zaštita
- lako i jednostavno upravljanje i rukovanje
- ublaživači udara sprečavaju oštećenja
- trostrani nož - tri puta duži radni vijek
- postupak podešavanja čeljusti oštrica

## Kako podesiti oštrice?

- oslobodite sigurnosnu maticu

- izvadite vijak iz žlijeba i stežite sve dok se potpuno ne izgubi prostor između oštrica; zatim vijak vratite u žlijeb
- Stegnite sigurnosnu maticu

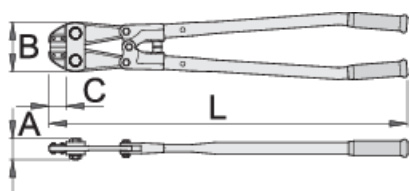



	L	A	B	C	
615256	750	43	96	46	4060
615257	900	47	109	50	6300

spособnost rezanja (10N=1kg)

	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
615256	750	8	13
615257	900	9	16

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Upotreba (pictures)



Rezervni dijelovi



Rezervni dijelovi za art. 596PLUS/6G



Rezervni noževi za art. 596PLUS/6G



## Frequently asked questions

**Can we eliminate the clearance between the blades of the bolt cutter?**

Of course. The procedure is described in the instructions.

**If we change the triangular blade, do we have to adjust the clearance as well?**

When installing, it is necessary to make sure that the blades are installed in parallel and that the screws are tightened accordingly.