Škare za betonsko željezo sa izmjenjivim trokutnim noževima

596PLUS/6G



Profili

Atributi proizvoda

- materijal: Premium Hard krom-vanadijev čelik
- noževi izmjenjiv i podesivi u tri položaja, u cijelosti ojačani i zakaljeni
- ručke izrađene od čelične cijevi, lakirane i obložene robusnom plastikom


Prednosti:

- ekstremna snaga i minimalna težina
- izuzetna otpornost na maksimalne sile rezanja
- kompletna anti-korozijska zaštita
- lako i jednostavno upravljanje i rukovanje
- ublaživači udarca sprečavaju oštećenja
- trostrani nož - tri puta duži radni vijek
- postupak podešavanja čeljusti oštrica

Kako podesiti oštrice?

- oslobodite sigurnosnu maticu

- izvadite vijak iz žlijeba i stežite sve dok se potpuno ne izgubi prostor između oštrica; zatim vijak vratite u žlijeb
- Stegnite sigurnosnu maticu

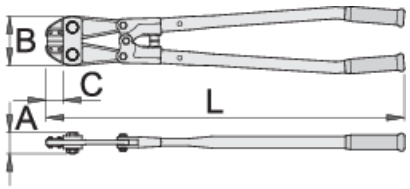

			L	C	
615256	750	30	750	46	4060
615257	900	36	900	50	6300


sposobnost rezanja (10N=1kg)


	L	max 1560 N/mm² Ø	max 750 N/mm² Ø
615256	750	8	13
615257	900	9	16

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

upotreba (pictures)









Rezervni djelovi

 Rezervni dijelovi za art. 596PLUS/6G

 Rezervni dijelovi za art. 596PLUS/6G

Frequently asked questions

Can we eliminate the clearance between the blades of the bolt cutter?
Of course. The procedure is described in the instructions.

If we change the triangular blade, do we have to adjust the clearance as well?
When installing, it is necessary to make sure that the blades are installed in parallel and that the screws are tightened accordingly.