

Ađır hizmet tipi yan keskiler

466/1VDEDP



Profiles



Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Product features


- malzeme: özel alet çeliđi
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- kesici ağızlar endüksiyonla sertleştirilmiştir
- başlık cilalıdır
- yüzey bitirme: ISO 1456:2009 standardına göre krom kaplamalı
- ISO 5749 ve EN IEC 60900 standardına göre yapılmıştır

Avantajları:

- saplar ek emniyet için çift katmanlı - çift renki yalıtımla yalıtılmıştır

Önemli!

- ikinci katmanın görünmesi halinde, VDE aletinizi yenisiyle deđiştirin

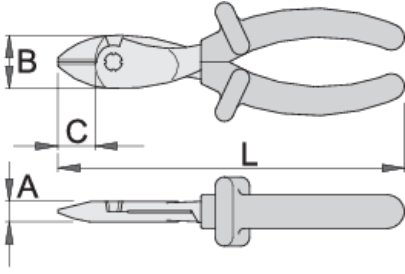

Barcode	L	B	A	C	Weight	Availability
619195	180	28	11	20	303	Till end of stock
619196	200	27	11	21	351	

kesme kapasitesi (10N=1kg)

Barcode	L	max 2150 N/mm ² Ø↑	max 750 N/mm ² Ø↑
619195	180	1,8	3,0
619196	200	2,0	3,5

* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

Frequently asked questions

Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.