

Multifunktions-Diagonalseitenschneider

462/1BI



Profile




Produkteigenschaften

- Material: Premium Plus Kohlenstoffstahl
- Schneiden induktiv gehärtet
- Kopf poliert
- verchromt gemäß EN12540
- Zweikomponentengriffe mit Abgleitschutz

Vorteile:

- **Abziehen von Kabelisolierungen mit 1,5mm² und 2,5mm²**

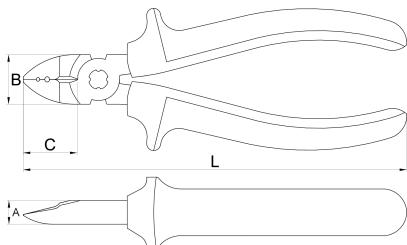

L

B

A

C





L

B

A

C



624059

160

21

10

22

211

Schneidwerte (10N=1kg)

L	max 1560 N/mm ² Ø↑	max 750 N/mm ² Ø↑
---	-------------------------------	------------------------------

624059

160

1,6

2,5

* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

Häufig gestellte Fragen

What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.