

# Flachrundzange mit Schneide, schutzsolliert

506/1VDEBI



## Profile



## Standards


DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Produkteigenschaften

- Material: Premium Plus Kohlenstoffstahl
- geschmiedet und vergütet
- Schneiden induktiv gehärtet
- Kopf poliert
- verchromt nach Standard ISO 1456:2009
- zwei Komponenten Kunststoffgriffe mit Abgleitschutz
- gefertigt laut Standard ISO 5745 und EN IEC 60900

## Vorteile:

- Auch zum Zusammenpressen und Trennen von Kabeln und anderen empfindlichen Gegenständen
- Greiffläche gezahnt

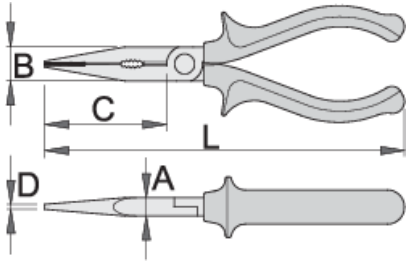

	L	B	D	A	C	
610435	160	16	2.5	9	49	137

Schneidwerte (10N=1kg)

	L	max 1560 N/mm <sup>2</sup> Ø↑	max 750 N/mm <sup>2</sup> Ø↑
610435	160	1,6	2,0

\* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

## Häufig gestellte Fragen

**Are certified insulated tools made through a different procedure than non-certified insulated tools?**

The tools are made according to the same procedure.

**Are insulated (VDE) tools considered as personal protective equipment (PPE)?**

According to EU regulations, VDE tools are not considered as PPE.

**Is it possible to work with insulated pliers under electrical voltage?**

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

**Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.