

IRONGATOR bankschroef

721/6






Profielen



Product attributen

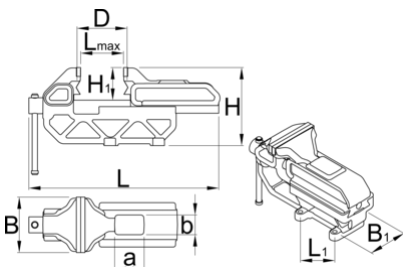
- behuizing van grijs gietijzer
- Bekken gesmeed in koolstofstaal, gehard en getemperd
- gelakte behuizing, bekken anticorrosief geolied, andere onderdelen verzinkt
- spil beschermd tegen beschadiging
- uniPRO geleiders verzekeren een precies glijden van bewegende delen
- ingenieurs bankschroef kan gecombineerd worden met draaivoet



	B	L↑	L	D	H1	a	b	H	L1	B1	
621564	80	100	215	11 - 35	46	42	28	113	70.4	48	3500
621481	125	160	336	17 - 62	73	66	44	176	110	75	14400
621567	150	190	400	20 - 66	88	80	53	211	132	90	24200
621570	200	220	461	24 - 80	103	93	62	265	154	105	37800

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)

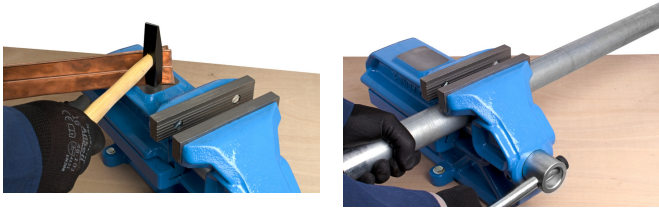

Accessoires



Draaibare voet voor 721/6 en 721Q/6



Reserve bek voor 721/6 en 721Q/6, Aluminium

Onderdelen



Reserve bek voor 721/6 en 721Q/6



Reserve bek voor 721/6 en 721Q/6, Aluminium

Veiligheidstips



- Avoid clamping with heavy pressure on the corner of the vice jaws as it may break off a corner of a jaw.



- Don't use the jaws of a vice as an anvil.

- Replace a bent handle as soon as possible.
- Use bolts in all of the holes in the base of the vice.
- Use lock washers under the nuts.
- When work is held in a vice for sawing, saw as close to the jaws as possible to prevent vibrations. Be careful not to cut into the jaws.
- When clamping extra long work, support the far end of work rather than putting extra pressure on the vice.
- Regularly lightly oil all moving parts.
- If the threaded part of the vice is exposed, keep it free of chips and dirt.
- Discard any vice that exhibits the slightest hairline fracture.
- Always use a vice large enough to hold the work without strain.
- Never use an extension handle for extra clamping pressure.
- Never pound on the handle to tighten beyond hand pressure.
- Never try to repair a vice by welding or brazing.
- Don't try to bend a heavy rod in a light vice.