

Чук шлосерски

812



Профили




Параметри на продукта

- материал: специална инструментална стомана
- кован
- ударните повърхности са индуктивно закалени
- боядисани
- дръжка от ясеново дърво със специална овална форма
- изработен в съответствие със стандарт DIN 1041

Стандарти

DIN 1041

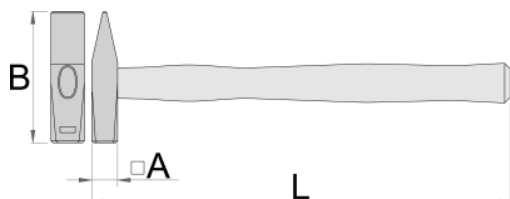

gr

A

L

B



601796

100

15

260

82

145

601797




150

17,5

280



88

225

	gr 	A	L	B	
601799	200	19	280	95	280
601801	250	21	300	100	340
601802	300	22,5	300	105	380
601803	400	25	310	112	487
601804	500	27,5	320	118	625
601805	600	30	330	122	720
601806	800	33	350	130	955
601807	1000	36	360	135	1150
601809	1500	42	380	145	1690
601810	2000	47	400	155	2195






Опаковки на дребно

	MA	MB	MC	
601796	81	260	14,7	150
601797	88	280	17,5	230
601799	94	280	19,4	285
601801	98	300	20,5	345
601802	104	300	22,4	385
601803	110	310	25,5	492
601804	119	320	28	630
601805	122	330	30	725
601806	130	350	32,2	960
601807	135	360	36	1155
601808	141	380	40,2	1435
601809	142	380	42,5	1695
601810	155	400	47,2	2200

Транспортна опаковка

		TA	TB	TC	
--	---	----	----	----	---

		ТА	ТВ	ТС	
601796	1				
601797	1				
601799	1				
601801	1				
601802	1				
601803	1				
601804	1				
601805	1				
601806	1				
601807	1				
601808	1				
601809	1				
601810	1				

Резервни части



Дървена дръжка с клин за чукове



Клин за чукове