
1"气锤

1591



配置文件

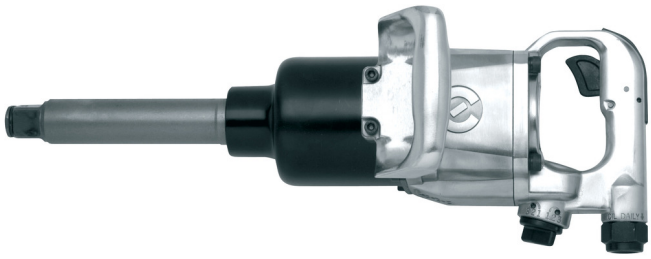

产品属性

- 每分钟4000转的空载转速
- 最大扭力2439 Nm
- 最大气压：6.2 Bar
- 空气消耗量340 升/分钟
- 1/2"进气口
- 最大螺栓尺寸M36

优势：

- 控制扭力
- 快速拧紧
- 应用范围广泛


用途:

- 汽车行业
- 航空业
- 农业设备

- 重工业
- 大型建筑机械
- 造船业
- 单独安装

重要事项！

- 务必使用Unior气动套筒

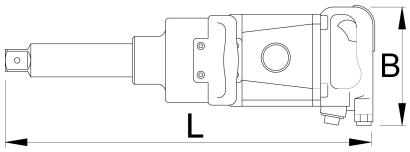

		B	L	Nm	
615325	1"	650	495	2439	13000

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

Accessories


气动管接头


气动管接头


3/4"气动过滤调节器和润滑器


螺旋气动软管

Safety tips

- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Always disconnect tools not in use from the air supply.

- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.