

Steckschlüssel 12-Kant 3/8 Zoll

238/1 12p



Profile








Standards



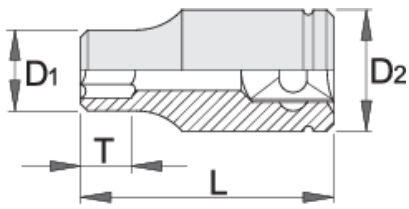

ISO 2725-1

Produkteigenschaften

- Material: Premium Flex Chrom-Vanadium-Stahl
- geschmiedet, gehärtet und vergütet
- verchromt gemäß Industriestandard ISO 1456:2009
- poliert
- gefertigt laut Standard ISO 2725-1 (nur metrische Dim.)



		L	D1	D2	T↑		
617122	6	28	10.2	16.9	8	28	Till end of stock
616905	7	28	10.6	16.9	8	28	Till end of stock
616906	8	28	11.8	16.9	8	29	Till end of stock
616907	9	28	13.2	16.9	8	29	Till end of stock
616908	10	28	14.5	16.9	8	30	Till end of stock
616909	11	28	15.7	16.9	8	29	Till end of stock
616910	12	28	16.9	16.9	8	28	Till end of stock
616911	13	28	17.9	17.9	8	32	Till end of stock
616912	14	28	19.6	17,9	12	39	Till end of stock
616913	15	28	20,9	20,9	12	46	Till end of stock
616914	16	30	21.9	21.9	12	48	Till end of stock
616915	17	30	23.5	23.5	12	49	Till end of stock
616916	18	30	24.7	21	12	65	Till end of stock
616917	19	30	25.9	23	14	73	Till end of stock
616918	20	32	27.2	24	14	86	Till end of stock
616919	21	32	27.9	25	14	88	Till end of stock
616920	22	32	29.7	26	14	105	Till end of stock
616921	23	32	31.7	27	14	120	Till end of stock
616922	24	32	31.9	28	16	112	Till end of stock
616923	1/4"	28	10.2	16.9	8	28	Till end of stock
616924	5/16"	28	11.8	16.9	8	29	Till end of stock
616925	3/8"	28	14.5	16.9	8	30	Till end of stock
616926	7/16"	28	15.7	16.9	8	29	Till end of stock
616927	1/2"	28	17,9	17,9	8	32	Till end of stock
616928	9/16"	28	19,7	19.7	12	39	Till end of stock
616929	5/8"	30	21,9	21.9	12	48	Till end of stock

		L	D1	D2	T↑		
616930	11/16"	30	23,5	23.5	12	59	Till end of stock
616931	3/4"	30	25.9	23	14	73	Till end of stock
616932	13/16"	32	27.9	25	14	88	Till end of stock
616933	7/8"	32	29.5	26	14	105	Till end of stock
616934	15/16"	32	31.9	28	14	112	Till end of stock
616935	1"	32	33.9	30	14	132	Till end of stock

* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

Häufig gestellte Fragen

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.