

# Pneumatic die grinder

1516



## Profiles



## Product features

- free speed 25000 revolution per minutes
- maximum air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"
- collet capacity 6 mm
- internal hose size 10mm


## Advantages:

- safety lever which prevents accidental turn-on
- simple clamping of thin cut-off wheels (grinding/polishing pins) and other parts/ extensions
- extreme power based on size
- small and compact tool
- continuously variable regulation of rpm

## Usage:

- precise grinding

- full grinding
- tool industry
- car industry
- aircraft industry
- cleaning of welds
- cleaning of concrete and wall surfaces
- cleaning of wooden surfaces
- removal of colours and varnish
- removal of rust
- grinding of bearings
- grinding of motor valves
- grinding of gears and coils
- various other surfaces

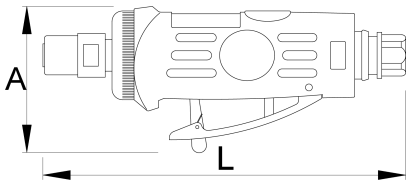

617731

L

155

A

60



390

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## Usage (pictures)



## Photo (pictures)



## Accessories



Coupling, male part



Coupling, male part



Coupling, female part



Coupling, female part



Pneumatic filter regulator and lubricator 3/8"



Pneumatic filter regulator and lubricator 1/2"



Spiral pneumatic hose

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.



- Always disconnect tools not in use from the air supply.

- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.