# Kliješta kombinirana

405/4G




## Profili

Premium

## Zatvori pretraživanje

ISO 5746

## Atributi proizvoda

- materijal: Premium Plus ugljični čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- završna obrada čeljusti: fino brušenje
- završna obrada: fosfatiranje po standardu DIN12476
- robusne plastične navlake za ručke
- izrađena prema standardu ISO 5746

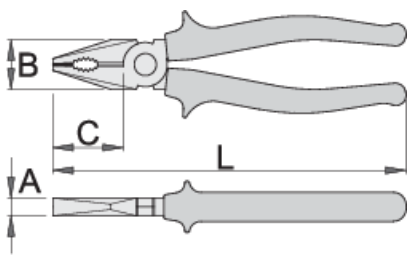

| | L | B | C | A | |
|---|---|---|---|---|---|
| 608668 | 160 | 24 | 35 | 9.5 | 224 |
| 608669 | 180 | 27 | 38 | 10 | 273 |
| 608670 | 200 | 29 | 41 | 10.5 | 351 |

sposobnost rezanja (10N=1kg)

| | L | max 1560 N/mm² Ø | max 750 N/mm² Ø |
|---|---|---|---|
| 608668 | 160 | 1,6 | 2,0 |
| 608669 | 180 | 1,8 | 2,5 |
| 608670 | 200 | 2,0 | 2,5 |

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## upotreba (pictures)





# Safety tips

- Pliers should be oiled regularly. A drop of oil at the hinge will lengthen the tool life and assure easy operation.
- When cutting wire with pliers, you should always wear glasses or goggles.
- Handles are provided for comfort. They are not intended to give user any degree of protection against electric shocks and should never be used on live electric circuits.

- Don't use pliers for cutting hardened wire, unless specifically manufactured for this purpose.
- Don't expose pliers to excessive heat. This may ruin the tool.
- Don't use pliers as a hammer.
- Don't hammer on the handles. They may crack or break.
- Don't extend the length of plier handles to secure greater leverage.
- Don't use pliers on nuts or bolts. A wrench will do a better job and with less risk of damage to the fastener.