

Tronchese multifunzione a tagliente diagonale

462/1VDEDP



Profili



Attributi del prodotto


- materiale: acciaio al carbonio plus premium
- interamente bonificato
- bordi di taglio induriti a induzione
- teste lucidate
- finitura superficiale: cromata ISO 1456:2009
- conforme allo standard EN IEC 60900

Vantaggi:

- Per spellare fili isolati dei singoli conduttori 1,5 mm² e 2,5mm²
- impugnatura bicomponente - bicolore isolata, per una doppia sicurezza

Importante!

- se è visibile il secondo strato, sostituite il vostro attrezzo VDE con uno nuovo

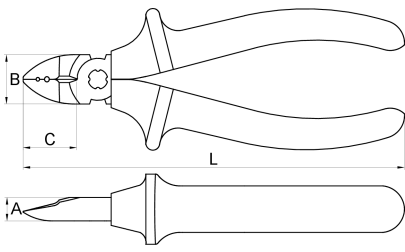

	L	B	A	C	
624061	160	21	10	22	224

capacità di taglio

	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
624061	160	1,6	2,5

* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

Frequently asked questions

Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.