

Yan keskili ve boru ayarlı, düz kargaburun penseler

508/1BI



Profiles




Standards

DIN ISO 5745

Product features

- malzeme: özel alet çeliği
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- kesici ağızlı endüksiyonla sertleştirilmiş
- başlık cilalıdır
- yüzey bitirme: ISO 1456:2009 standardına göre krom kaplamalı
- ağır hizmet tipi iki bileşenli saplar
- kavrama yüzeyi tırtıllıdır
- ISO 5745 standardına göre yapılmıştır
- ayrıca sıkıca tutmak ve kablolardan ve diğer hassas nesnelere ayırmak için kullanılır

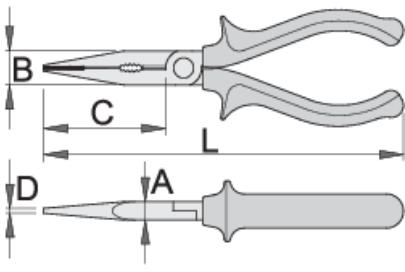

	L	B	D	A	C	
607876	170	17	2.5	9	61	156
607877	200	17	2.5	9	77	191

kesme kapasitesi (10N=1kg)

	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
607876	170	1,6	2,0
607877	200	1,8	2,5

* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?

407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.