

# Ađır hizmet tipi yan keskiler

466/1BI



## Profiles

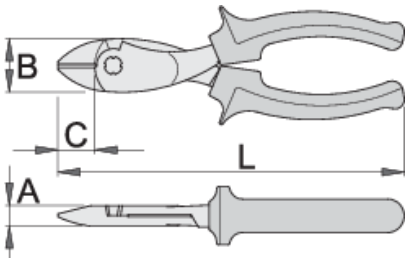




## Standards

DIN ISO 5749


## Product features

- malzeme: özel alet çeliđi
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- kesici ağızlı endüksiyonla sertleştirilmiş
- başlık cilalıdır
- yüzey bitirme: ISO 1456:2009 standardına göre krom kaplamalı
- ağır hizmet tipi iki bileşenli saplar
- ISO 5749 standardına göre yapılmıştır



	L	B	A	C	
617686	160	23.5	10	20.5	214
608850	180	28	11	20	313
608837	200	27	11	21	344

kesme kapasitesi (10N=1kg)

	L	max 2150 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
617686	160	1,6	2,5
608850	180	1,8	3,0
608837	200	2,0	3,5

\* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

## Frequently asked questions

### **What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?**

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

### **What is meant by the statement that pliers are made in accordance with the stated ISO standard?**

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.