

Capete chei tubulare 1/2" cu 12 laturi, pentru lucrul in siguranta la inaltime

190/1 12p-H



Profile



Caracteristicile produsului


- material:crome vanadium
- forjata, calire si revenire totala
- acoperire cromare conform EN12540
- polizate

Avantaje:

- Greutatea uneltei este marcata pe fiecare in parte
- Fabricate în conformitate cu standardele ISO 3315-B (accesorii) și ISO 2725-1B (Chei)
- Cheiile și accesorile de conectare necesită utilizarea unui instrument specific (articoulul 1111)
- Chei și accesorii cu găuri laterale

atentionari!

- Conectarea cheilor și accesoriilor trebuie să fie efectuate într-o zonă securizată anterior sau în siguranță

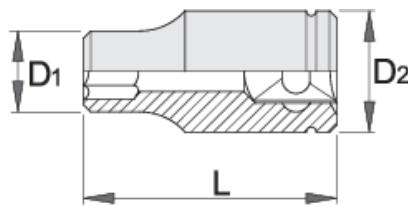

		mm	L	D1	D2	T↑	
626143	10	38	15	22,9	12	53	
626144	11	38	16,3	22,9	12	55	
626145	12	38	17,9	22,9	12	55	
626146	13	38	18,8	22,9	12	56	
626147	14	38	19,7	22,9	12	59	
626148	15	38	20,4	22,9	12	61	
626149	16	38	22,9	21,5	12	57	
626150	17	38	24,3	22	12	58	
626151	18	38	25,5	23	12	67	
626152	19	38	26,8	24	14	72	
626153	20	38	28,1	24	14	76	
626154	21	38	29,3	25	14	84	
626155	22	38	30,4	25	14	86	
626156	23	40	31,7	26	14	99	
626157	24	42	33,1	28	16	120	
626158	27	43	37	30	18	143	
626159	30	46	40,7	34	22	204	
626160	32	46	43,2	36	22	225	
626388	36	46	48	42	22	268	
626203	3/8"	38	15	22,9	12	46	
626204	7/16"	38	16,3	22,9	12	46	
626205	1/2"	38	18,8	22,9	12	50	
626206	9/16"	38	20,4	22,9	12	50	
626207	19/32"	38	20,4	20,7	12	49	



L

D1

D2

T[↑]

626208	5/8"	38	22,9	21,5	12	55
626209	11/16"	38	25,5	23	12	56
626210	3/4"	38	26,8	24	14	59
626211	25/32"	38	27,9	24	14	76
626212	13/16"	38	29,3	25	14	72
626213	7/8"	40	31,7	26	14	89
626214	15/16"	42	33,1	28	16	108
626215	1"	42	35,3	30	16	121
626216	1.1/16"	43	37	30	18	131
626217	1.1/8"	43	39	32	20	160
626218	1.3/16"	46	40,7	34	22	185
626219	1.1/4"	46	43,2	36	22	207

* Imaginea produsului este simbolica. Toate dimensiunile sunt exprimate în mm, greutatea în grame.


0 (pictures)



The carabiner on the lanyard is attached to the ring on the tool. The rings on the tools are large enough to accept 2 carabiners.



The carabiner on the lanyard has to be protected against opening using a lock ring.

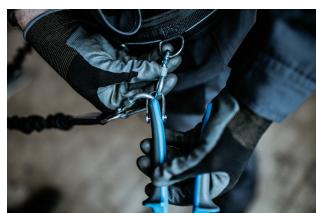

Before removing the tool from the belt, unscrew the lock ring on the carabiner on the belt.



Open the carabiner on the belt and remove the tool, which is attached to a lanyard, from the carabiner on the belt. The tool is now ready for use.



Correct attachment of the tool to the lanyard. Return the tool to the belt following the steps in reverse order.



Using the socket remover (Article 1111) depress the pin in the hole while removing the socket from the square drive of the ratchet and then switch the socket or extension.

Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.
- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

Safety (pictures)



Frequently asked questions

Putem folosi un instrument pentru lucrul la înălțime ca un instrument normal?

Un instrument pentru lucrul la înălțime are aceeași utilitate ca un instrument normal, cu excepția faptului că la acest instrument se adaugă o cataramă metalică nituită nedetașabilă.

Greutatea declarată pe unealtă pentru lucrul în condiții de siguranță la înălțime include, de asemenea, greutatea inelului metalic?

Greutatea instrumentului marcat pe instrument, a inclus, de asemenea, greutatea inelului metalic