

Pneumatic reversible ratchet with composite housing

1522



Profiles



Product features

- free speed 200 revolution per minutes
- max. torque 41 Nm
- recommended air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"


Advantages:

- thick wall ratchet head
- ball bearing
- cushioned grip
- new air regulator
- 360° swivel air exhaust
- rear exhaust
- low noise 79dB(A)
- small and compact tool

- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction

Usage:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting
- Important!
- The use of Unior IMPACT sockets is recommended.

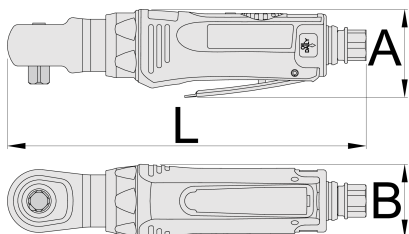

| | | | | | | |
|--------|------|----------|----------|----------|----|-----|
| | | L | A | B | | |
| 627565 | 1/4" | 196 | 49 | 40,8 | 41 | 749 |

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Photo (pictures)



Accessories



Coupling, male part



Coupling, female part



Spiral pneumatic hose



Pneumatic filter regulator and lubricator 1/4"

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.