

# Pistol de insurubare reversibil cu soc

1566



## Profile



1/2"



## Caracteristicile produsului

- viteza de rotatie 8000 rot/min
- Cuplu maxim 1223Nm
- .
- .
- Presiune nominala de lucru:6.2bar
- Consum de aer comprimat 113 l/min
- Racord de aer 1/4"
- Nivel de zgomot 93dB(A)
- Diametrul maxim de strangere M 24

## Avantaje:

- Carcasa motorului pneumatic din material compozit
- mecanism cu ciocan dublu
- Schimbare de sens cu o singura mana
- Puternic si compact
- Selector de turatii

## Utilizare

- industria auto
- industria aerospatiala
- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale


## Important

- Folositi intotdeauna capetele chei tubulare de impact UNIOR

		L	A	B		
627570	1/2"	187	70	193	1223	2227

\* Imaginea produsului este simbolica. Toate dimensiunile sunt exprimate în mm, greutatea în grame.

## 0 (pictures)

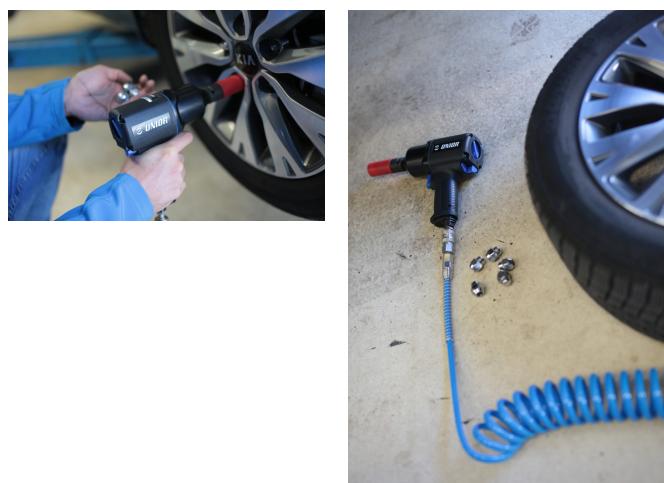

## Photo (pictures)



## Accessories



Cuplaj, partea tata



Cuplaj, partea tata



Cuplaj, partea mama



Cuplaj, partea mama



Filtru regulator si ungator pneumatic 3/8"



Filtru regulator si ungator pneumatic 1/2"



Furtun pneumatic elicoidal

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.



- Always disconnect tools not in use from the air supply.

- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.